

OUT BUILDINGS
ATTACHED BUILDINGS SUCH AS GARAGES, GLASSHOUSES, SOLARIUMS OR POOL ENCLOSURES TO THE MAIN BUILDING SHALL HAVE AN EXTERNAL FABRIC THAT ACHIEVES THE REQUIRED LEVEL OF THERMAL PERFORMANCE FOR THAT BUILDING, BE SEPARATED FROM THE MAIN BUILDING WITH CONSTRUCTION HAVING THE REQUIRED LEVEL OF THERMAL PERFORMANCE FOR THE BUILDING, OR NOT COMPROMISE THE THERMAL PERFORMANCE OF THE MAIN BUILDING. IN ADDITION, AN ATTACHED BUILDING CAN ONLY BE EXEMPTED FROM THE REGULATIONS IF IT DOES NOT CONTAIN HABITABLE SPACES AND IS NOT PROVIDED WITH A HEATING/COOLING INSTALLATION, OR IF ANY HEATING/COOLING INSTALLATION IS ENTIRELY FED FROM RENEWABLE ENERGY SOURCES.

SHADING
WHERE SHADING IS USED, THE BUILDING SHALL HAVE A PERMANENT FEATURE SUCH AS A VERANDA, BALCONY, FIXED CANOPY, EAVES OR SHADING HOOD WHICH EXTENDS HORIZONTALLY ON BOTH SIDES OF THE GLAZING FOR THE SAME PROJECTION DISTANCE OR PROVIDES THE EQUIVALENT SHADING WITH A REVEAL OR OTHER SHADING ELEMENT OR HAVE AN EXTERNAL SHADING DEVICE, SUCH AS A SHUTTER, BLIND, VERTICAL OR HORIZONTAL BUILDING SCREEN WITH BLADES, BATTENS OR SLATS, WHICH IS CAPABLE OF RESTRICTING AT LEAST 80 % OF SUMMER SOLAR RADIATION AND IF ADJUSTABLE, IS READILY OPERATED EITHER MANUALLY, MECHANICALLY OR ELECTRONICALLY BY THE BUILDING OCCUPANTS.

BUILDING MUST BE IN ACCORDANCE WITH THE APPROVED BUILDING PLAN. NO CHANGES MAY BE MADE TO SUCH PLANS WITHOUT THE EXPRESSED CONSENT OF THE AUTHOR OF SUCH DOCUMENT

BUILDING MUST BE IN ACCORDANCE WITH THE APPROVED BUILDING PLAN. NO CHANGES MAY BE MADE TO SUCH PLANS WITHOUT THE EXPRESSED CONSENT OF THE AUTHOR OF SUCH DOCUMENT

ALL REINFORCED CONCRETE SLABS, FOUNDATIONS, COLUMN DETAILS, BEAMS, STAIRS AND RETAINING WALLS TO BE BUILT STRICTLY IN ACCORDANCE WITH ENGINEERS DETAIL AND UNDER HIS SUPERVISION

ALL DIMENSIONS TO BE MEASURED OUT AND PEGGED ON SITE BEFORE COMMENCING WORK

NOTE: CONNECTERS FOR TOILET PANS: THE CONNECTER WHICH IS USED TO CONNECT THE OUTLET SPIGOT OF A TOILET PAN TO A SOIL PIPE SHALL EITHER COMPLY WITH SANS 4633 OR NOT PERMIT ANY LEAKAGE OF SOIL WATER AT THE JOINT. HAVE A MAXIMUM WATER ABSORPTION OF 2% AND BE SUFFICIENTLY FLEXIBLE TO ACCOMMODATE SURFACE IRREGULARITIES OR DIMENSIONAL VARIATIONS BETWEEN SUCH SPIGOT AND PIPE. THE INNER SURFACE OF THE CONNECTER SHALL BE SMOOTH AND SHALL NOT BE OF THE CONCERTINA TYPE OR SUCH AS WILL ALLOW THE COLLECTION OF SOIL WITHIN THE CONNECTER

NOTE: TOILET PANS : ANY PEDESTAL TOILET SHALL BE MANUFACTURED AS A SINGLE UNIT. WHERE SUCH PAN IS INSTALLED IN SUCH A POSITION THAT THE JOINT BETWEEN ITS OUTLET AND SPIGOT AND THE SOIL PIPE INTO IT DISCHARGES IS CONNECTED , SUCH PAN SHALL BE INSTALLED IN SUCH A MANNER THAT THERE IS ACCESS TO SUCH JOINT

MECHANICAL VENTILATION AND AIR CONDITIONING
OR MECHANICAL VENTILATION SYSTEMS INSTALLED IN BUILDINGS SHALL COMPLY WITH THE RELEVANT NATIONAL LEGISLATION AND WITH PROVISIONS OF:

SEPARATE DISTRIBUTION SYSTEMS
IF ZONES HAVE SPECIAL PROCESS TEMPERATURE REQUIREMENTS OR HUMIDITY REQUIREMENTS, THEY SHALL BE SERVED BY AIR DISTRIBUTION SYSTEMS SEPARATE FROM THOSE SERVING THE ZONES REQUIRING ONLY COMFORT CONDITIONS OR SHALL BE PROVIDED WITH SUPPLEMENTARY CONTROL SPECIFICALLY FOR COMFORT PURPOSES ONLY, EXCEPT WHERE THE TOTAL SUPPLY AIR TO THE COMFORT HEATING OR COOLING ZONES IS NO MORE THAN 25 % OF THE TOTAL SYSTEM SUPPLY AIR PRIMARILY USED IN EXCESS OF SPECIAL PROCESS PURPOSES, THE TOTAL CONDITIONED FLOOR AREA OF THE ZONES REQUIRING COMFORT HEATING OR COOLING IS SMALLER THAN 100m² AND THE CONDITIONED FLOOR AREA IS ZONED BASED ON THE BUILDING ORIENTATION AND AVOIDS COOLING AND REHEATING TO ACHIEVE THE REQUIRED INDOOR CONDITIONS.

THE LEAKAGE OF THE DUCTWORK SHALL COMPLY WITH SANS 10173.

UNITARY AND PACKAGED EQUIPMENT
THE MINIMUM COEFFICIENTS OF PERFORMANCE OF UNITARY AND PACKAGED AIR-CONDITIONING EQUIPMENT ARE:

NOTE: TOILET PANS : ANY TOILET PAN SHALL BE SERVED BY ITS OWN SEPARATE FLUSHING DEVICE AND ANY SEAT ASSOCIATED WITH A TOILET PAN SHALL HAVE A SMOOTH NON-ABSORBENT SURFACE AND SHALL BE HELD IN PLACE BY FASTENERS MADE OF NON CORROSIVE- RESISTANT MATERIAL


EQUIPMENT TYPE	CAPACITY RANGE ¹ kW	MINIMUM COP ^{2c}
UNITARY AND SPLIT TYPE	< 7	2.5
	7 < 19	2.6
	10 < 40	2.96
	40 < 70	2.72
PACKAGED AND SPLIT AIR CONDITIONER	> 70	2.64
WATER COOLED PACKAGE	< 20	3.2

IF RESISTANCE HEATING IS USED, HEATING POWER CONSUMPTION SHALL NOT EXCEED COOLING POWER CONSUMPTION EXCEPT IN THE CASE OF EQUIPMENT OF EQUIPMENT USING LESS THAN 10kW.
COP SHALL BE AS DETERMINED UNDER SUMMER DESIGN CONDENSING CONDITIONS OF 35 °C DRY BULB AMBIENT FOR AIR-COOLED SYSTEMS AND SUMMER DESIGN WET BULB FOR WATER-COOLED SYSTEMS.
COP SHALL INCLUDE AIRSIDE FAN POWER BUT EXCLUDE WATERSIDE COOLING SYSTEM POWER.


THE AIR CONDITIONING OR MECHANICAL VENTILATION SYSTEM SHALL BE DESIGNED TO BEST PRACTICE AND USING THE BEST AVAILABLE TECHNOLOGY. THE MINIMUM COMPONENT EFFICIENCIES AND VARIOUS SYSTEM DESIGN PARAMETERS TO ACHIEVE THE BEST EFFICIENCY ARE GIVEN ABOVE.
BUILDINGS SHALL BE SO DESIGNED THAT IN THE EVENT OF FAILURE OF AN AIR CONDITIONING OR MECHANICAL VENTILATION SYSTEM, AN ALTERNATIVE MEANS OF NATURAL VENTILATION SHALL BE PROVIDED.

BUILDING ENVELOPE AIR SEALING
ROOFS, EXTERNAL WALLS, AND FLOORS THAT FORM THE BUILDING ENVELOPE AND ANY OPENING SUCH AS WINDOWS AND DOORS IN THE EXTERNAL FABRIC SHALL BE CONSTRUCTED TO MINIMIZE AIR LEAKAGE. THE BUILDING SEALING CAN BE DONE BY METHODS SUCH AS CAULKING, OR ADDING SKIRTING, ARCHITRAVES, CORNICES OR ANY OTHER APPROVED METHOD.

AIR INFILTRATION AND LEAKAGE
IN CLIMATIC ZONES 1, 2, 4 AND 6 THE CEILING VOIDS AND ATTICS SHALL BE DESIGNED SO AS TO MINIMIZE AIR INFILTRATION. ACCORDINGLY, WALL PLATE AND ROOF JOINTS SHALL BE SEALED. ALL TILE ROOFS IN THESE CLIMATIC ZONES SHALL HAVE A TILE UNDERLAY OR RADIANT BARRIER AND THE JOINTS SHALL BE SEALED. THE JOINTS IN SHEETED ROOFS SHALL ALSO BE SEALED.

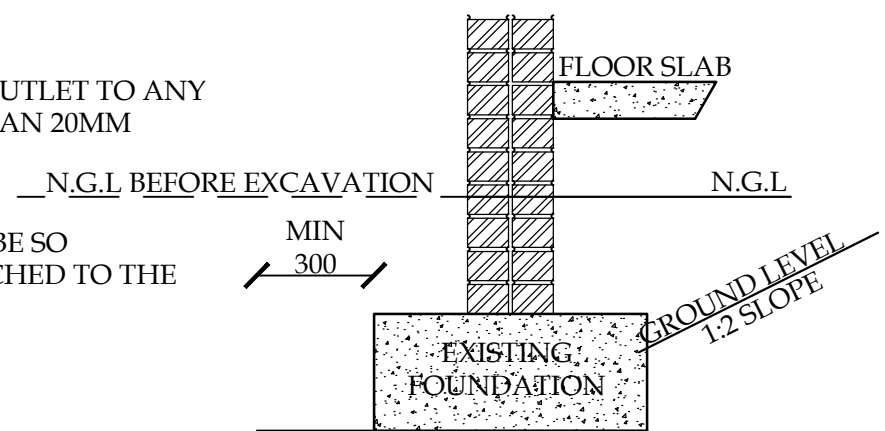


TEMPORARY EXCAVATION
EXISTING FOUNDATION
EXPOSED

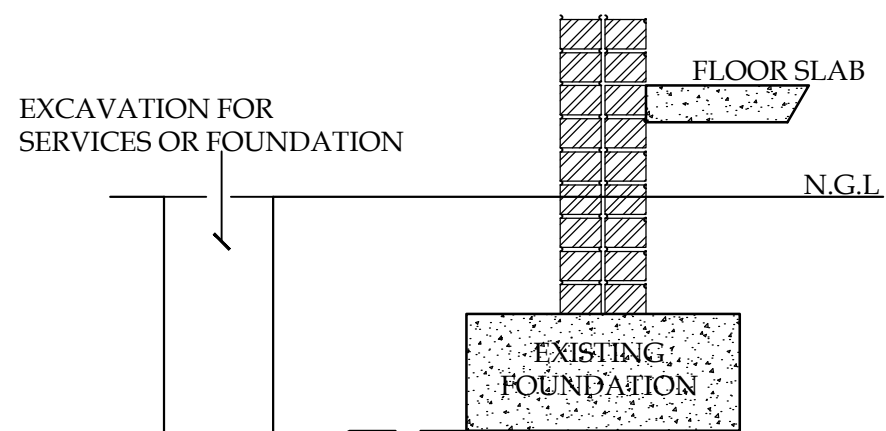


TEMPORARY EXCAVATION
NEAR EXISTING BUILDING

TEMPORARY EXCAVATION DETAIL SCALE 1:20

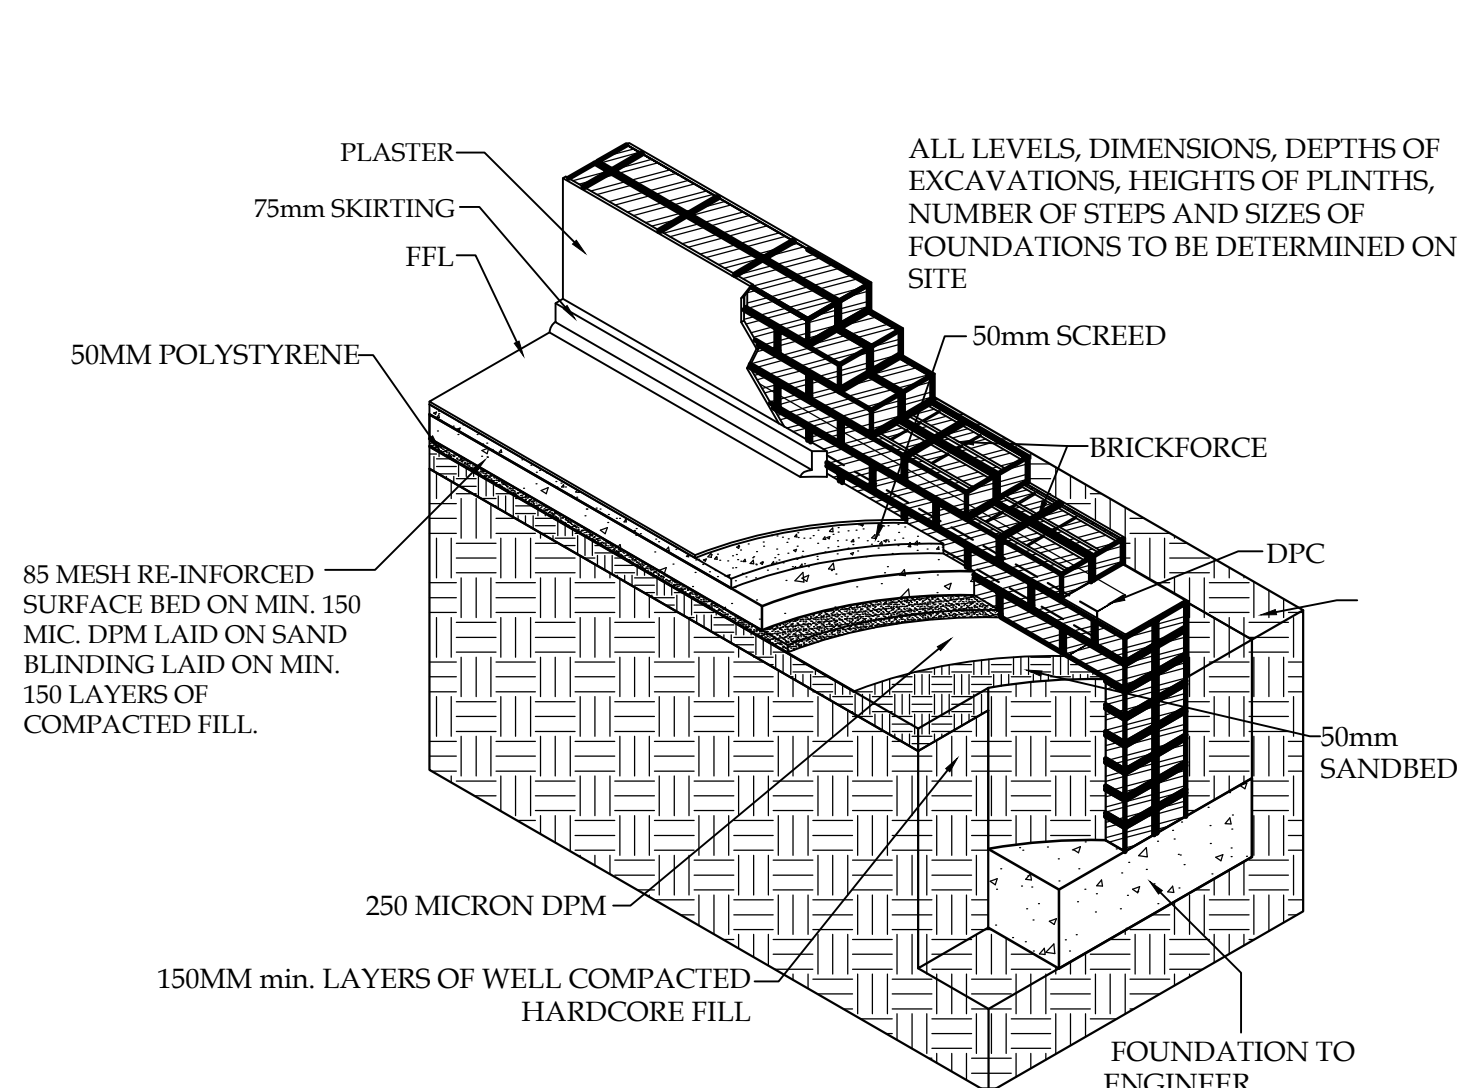

FOUNDATION DETAIL SCALE 1:20

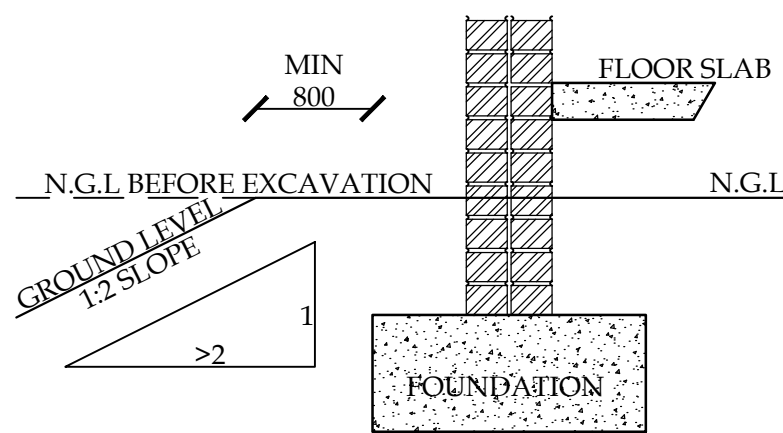

PERMANENT EXCAVATION DETAIL SCALE 1:20

SITE AREA : 86 6800m²

AREA SCHEDULE:
GROUND STOREY:

STAFF ROOMS 68.77m²
STAFF PATIO 6.59m²

TOTAL GST: 75.36m²

COVERAGE PROVIDED 0.008%

FAR PROVIDED 0,008

ALL DIMENSIONS TO BE MEASURED OUT AND PEGGED ON SITE BEFORE COMMENCING WORK

ALL REINFORCED CONCRETE SLABS, FOUNDATIONS, COLUMN DETAILS, BEAMS, STAIRS AND RETAINING WALLS TO BE BUILT STRICTLY IN ACCORDANCE WITH ENGINEERS DETAIL AND UNDER HIS/HER SUPERVISION

BUILDING MUST BE IN ACCORDANCE WITH THE APPROVED BUILDING PLAN. NO CHANGES MAY BE MADE TO SUCH PLANS WITHOUT THE EXPRESSED CONSENT OF THE AUTHOR OF SUCH DOCUMENT

FLOORS, WALLS, GEYSER PIPES AND ROOFS TO BE INSULATED IN ACCORDANCE WITH SANS 10400

ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH ENGINEERING DRAWINGS

- GENERAL
- 1.1 THIS DRAWING IS NOT TO BE SCALED. USE FIGURED DIMENSIONS ONLY. ALL DIMENSIONS AND HEIGHTS TO BE CHECKED AND VERIFIED BEFORE ANY WORK COMMENCES ON SITE. ANY DISCREPANCIES SHALL BE REPORTED TO THE ARCHITECT IMMEDIATELY. ALL LEVELS, HEIGHTS OF PLINTHS, DEPTH OF EXCAVATIONS AND NUMBER OF STEPS TO BE FINALLY CHECKED BY CONTRACTOR ON SITE.
- 1.2 THE SITE TO BE TREATED IN ACCORDANCE WITH S.A.B.S. CODE OF PRACTICE NO.0124-1977 WITH 'SHELDRIFF' TERMITE-PRUFE SOIL.
- 1.3 TOP OF FOUNDATIONS TO BE A MINIMUM OF 300mm BELOW NATURAL GROUND LEVEL.
- 1.4 BACKFILL TO FOUNDATIONS.
- 1.5 TOP OF 75mm CONCRETE SURFACE BED TO BE MINIMUM OF 150mm ABOVE FINISHED GROUND LEVEL.
- 1.6 75mm THICK CONCRETE SURFACE BED TO BE ON 'GUNPLAS' USB GREEN DAMP PROOF MEMBRANE ON SAND BINDING ON WELL COMPACTED FILL.
- 1.7 GUNDL: BRICKGRIP S.A.B.S. EMBOSSED D.P.C. 375 MIC. UNDER ALL WALLS, WINDOW CILLS AND AT CHANGES IN FLOOR LEVELS.
- 1.8 STORMWATER SHALL BE REMOVED FROM DWELLING, YARD AND SITE.
- 1.9 ELECTRICAL INSTALLATION SHALL BE 'HEINEMANN' EARTH LEAKAGE SYSTEM IN DISTRIBUTION BOARD.
- 1.10 ALL BUILDING WORK TO BE CARRIED OUT IN ACCORDANCE WITH LOCAL AUTHORITIES BUILDING BY-LAWS AND REGULATIONS.

- FOUNDATIONS
- 2.1 ALL FOUNDATIONS, RETAINING WALLS, STRUCTURAL CONCRETE WORK AND SUB SOIL STORMWATER DRAINAGE TO CIVIL ENG'S SPECIFICATIONS.
- 2.2 ALL SOIL COMPACTION TO CIVIL ENG'S SPECIFICATIONS.
- 2.3 ALL FOUNDATIONS TO BE REINFORCED AS REQUIRED BY ENGINEER.

- FLOORS
- 3.1 MIN. 75mm CONCRETE SURFACE BED.
- 3.2 25mm CEMENT SCREED TO ALL FLOORS.
- 3.3 SKIRTINGS TO BE PROVIDED.


- WALLS
- 4.1 220mm BRICK WALLS WITH GUNDL BRICKGRIP DPC.
- 4.2 BRICKFORCE EVERY 4 COURSES AND EVERY COURSE FOR 4 COURSES OVER OPENINGS
- 4.3 ALL BRICKWORK MIN. 7 Mpa CLASS II.
- 4.4 WINDOWS BUILT IN WITH GUNDL BRICKGRIP DPC.
- 4.5 ALL PAINTWORK TO COMPLY WITH MANUFACTURER'S SPECIFICATIONS WITH NECESSARY UNDERCOATS.
- 4.6 EXTERNAL TO PLAN INTERNAL PLASTER AND PAINT.

ALL LEVELS, DIMENSIONS, DEPTHS OF EXCAVATIONS, HEIGHTS OF PLINTHS, NUMBER OF STEPS AND SIZES OF FOUNDATIONS TO BE PLACED AT A HEIGHT OF EXISTING STRUCTURE

- ROOF A
- 5.1 CROMADEK SHEETING @ 30° PITCH- DARK DOLPHIN ON 38X50mm S.A. PINE PURLINS @ 1200mm MAX C/C ON 152X38mm S.A. PINE, GRADE 6, PREFABRICATED TRUSSES @ 1200 C/C ON S.A. PINE 114X38mm WALL PLATES. TRUSSES TO BE TIED DOWN WITH HOOP IRONS THREADED THROUGH FOUR COURSES OF BRICKWORK. PROVIDE SABS APPROVED PLASTIC UNDERLAY AND SISALATION INSULATION.
- 5.2 MIN. 170mm CONCRETE SLAB TO ENG'S DETAIL.
- 5.3 MIN. 55mm VEMICULITE INSULATING SCREED TO 1:60 FALL.
- 5.4 WATERPROOFING BY SPECIALIST TO MANUFACTURERS SPEC.
- 5.5 1500 P.V.C. RAINWATER DOWNPIPES FROM FULLBORE OUTLETS.
- 5.6 SKYLIGHTS TO MANUFACTURERS SPEC.
- 5.7 GUTTERS : MARLEY STREAMLINE SQUARE PROFILE RAINWATER GUTTERS + DOWNPIPES.
- 5.8 3mm SKIM COAT RHINOLITE ON PLASTERBOARD CEILING FIXED TO 38 X 38mm S.A. PINE BRANDING AT 450 C/C FIXED TO THE BEAMS.

- WINDOWS AND DOORS
- 6.1a ANY PANE OF GLASS WHICH IS TO BE INSTALLED WITHOUT A SUPPORT FRAME SHALL BE IN ACCORDANCE WITH SABS 0137
- 6.1b THICKNESS OF PANES IN RELATION TO THEIR AREA SHALL BE IN ACCORDANCE WITH SABS 0137
- 6.2 EXTERNAL SLIDING DOORS : STANDARD AS PER WINDOWS TO SCHEDULE.
- 6.3 INTERNAL DOORS : STANDARD HARDWOOD FRAMES TO SCHEDULE
- 6.4 WINDOWS : ALUMINUM TOP-HUNG
- 6.5 SLIDING DOORS : STANDARD ALUMINUM SLIDING DOORS TO SCHEDULE.

- DRAINAGE NOTES
- 7.1 1000 uPVC SEWER PIPE DRAIN WITH A MIN. FALL OF 1:60.
- 7.2 1000 OVP. AT HEAD OF DRAIN PIPE AS SHOWN.
- 7.3 RODDING EYES AT HEAD OF DRAIN, AT ALL CHANGES OF DIRECTION AND AT MAX. OF 25000 INTERVALS.
- 7.4 INSPECTION EYES AT ALL JUNCTIONS OF DRAIN, AND TO HAVE MARKED COVERS AT GROUND LEVEL.
- 7.5 DRAIN PIPE UNDER BUILDING TO BE PROTECTED AGAINST LOAD.
- 7.6 ALL WASTE PIPE TO HAVE 65mm RE-SEAL TRAPS, ALL WASTE PIPES TO BE ACCESSIBLE OVER ENTIRE LENGTH FOR CLEANING AND REPAIRS.
- 7.7 ALL WASTE PIPES UNDER FLOOR SLAB TO BE SLEEVED.
- 7.8 ALL SOIL FITTINGS WITH VERTICAL DISCHARGE GREATER THAN 1220 TO HAVE ANTISYPHON VENTPIEPES.
- 7.9 RAINWATER DOWNPIPES TO DISCHARGE A MIN. OF 2440 FROM ANY OPEN GULLY.
- 7.10 ALL DRAINAGE WORK TO BE CARRIED OUT IN ACCORDANCE WITH LOCAL AUTHORITIES DRAINAGE BY-LAWS AND REGULATIONS.



Open Studio Designs
Architectural & Interiors

Mobile 083-306-4315
Fax-086-543-8765
openstudio.design@gmail.com

PROPOSED STAFF ROOMS
ON PTN 465
OF THE FARM KROMDRAAI 560KQ
CLIENT:

WORKING DRAWINGS


TECHNOLOGISTS: W JUNG-KRUGER
ARCHITECT:

DATE: OCT'18 DWG NO: H/KD
DRAWN: WJK SHEET : 2 OF 6

GROUND STOREY SCALE 1:50

FLOORS, WALLS, GEYSER PIPES AND ROOFS TO BE INSULATED IN ACCORDANCE WITH SANS 10400

ALL TIMBER TO BE TREATED FOR DRY ROT, TERMITES AND SEALED WITH APPROVED WEATHER PROTECT SEALANT

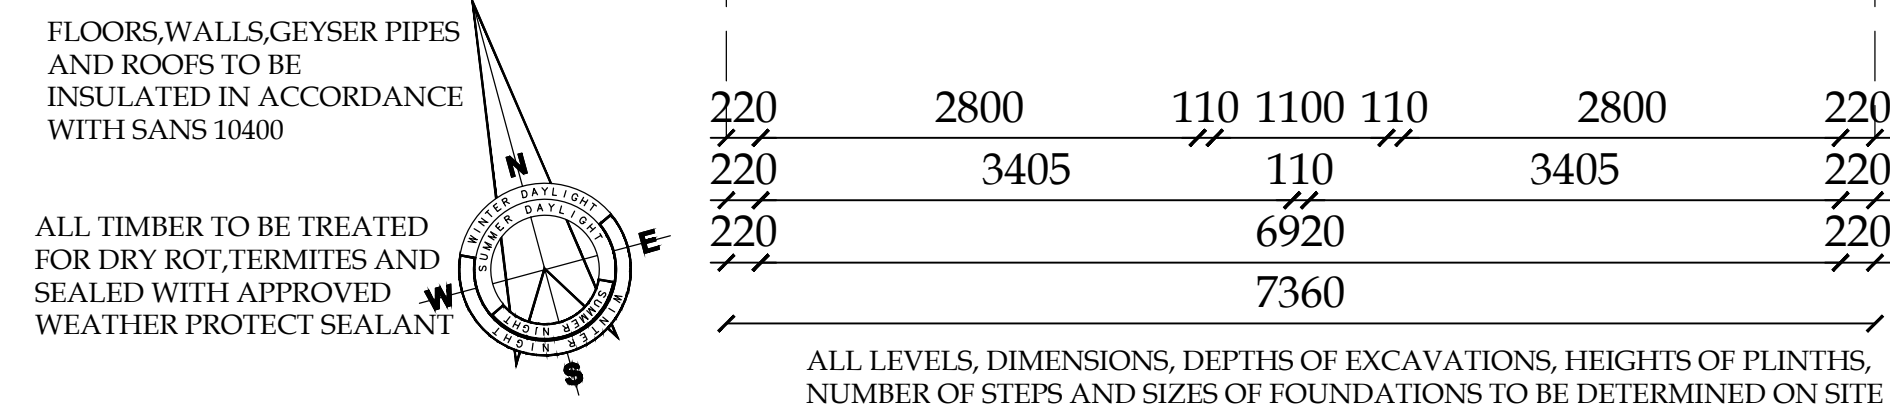

FLOORS, WALLS, GEYSER PIPES AND ROOFS TO BE INSULATED IN ACCORDANCE WITH SANS 10400