ACCURATE MEASUREMENTS TO BE TAKEN ON SITE BEFORE COMMENCING WORK. SITE MEASUREMENTS TO BE PEGGED OUT BEFORE COMMENCING SETTING OUT

SITE TO BE CLEARED OF ALL VEGETABLE MATTER, TREE STUMPS, TIMBER AND OTHER CELLULOSE MATERIAL,DEBRIS, REFUSE OR CONTAMINATED FECAL MATTER BEFORE LAYING FOUNDATIONS.


PTN 455

NO STORMWATER DEPOSIT ALLOWED OVER BOUNDARY WALL

NO PART OF BUILDING TO ENCROACH ON BOUNDARY

PTN 465

PTN 453

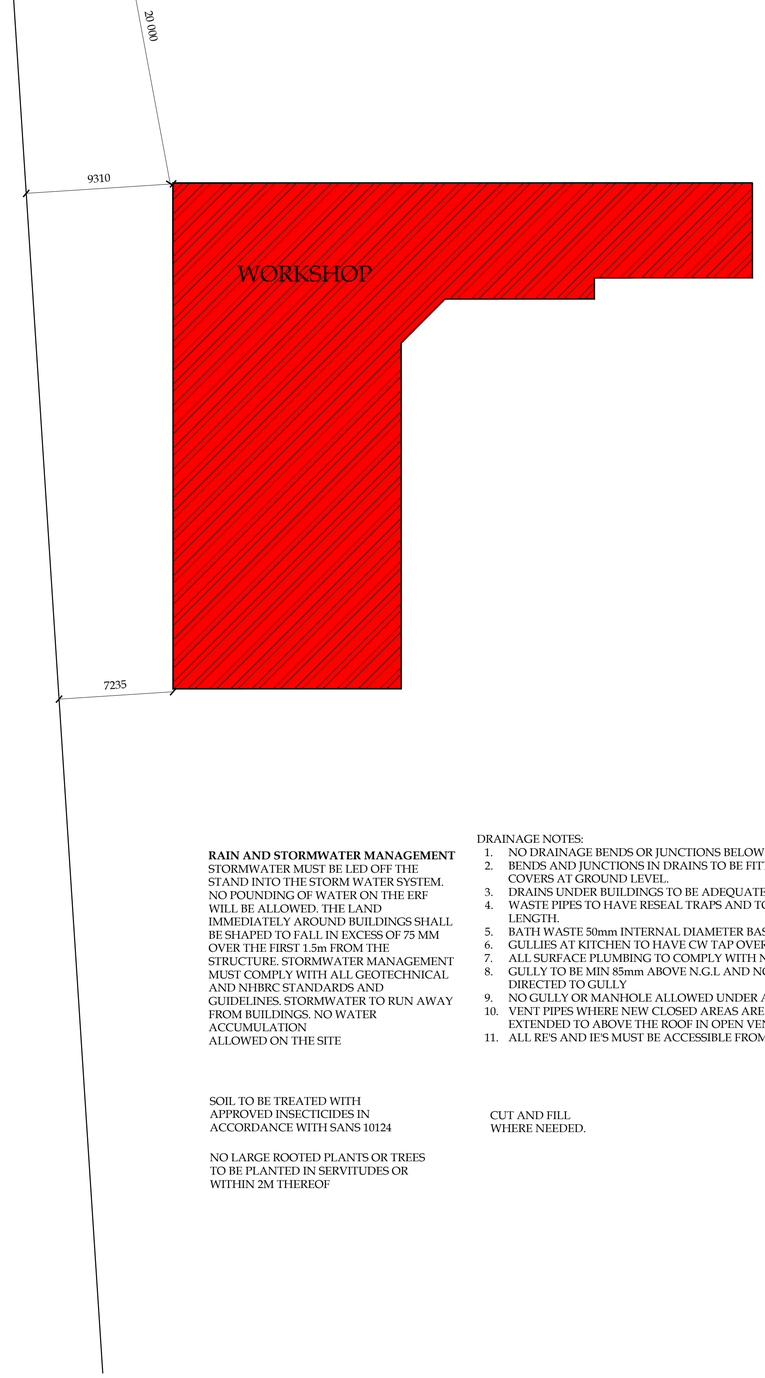

ALL LEVELS, DIMENSIONS, DEPTHS OF EXCAVATIONS, HEIGHTS OF PLINTHS, NUMBER OF STEPS AND SIZES OF FOUNDATIONS TO BE DETERMINED ON SITE

RAIN AND STORMWATER MANAGEMENT
STORMWATER MUST BE LED OFF THE STAND INTO THE STORM WATER SYSTEM. NO POUNDING OF WATER ON THE ERF WILL BE ALLOWED. THE LAND IMMEDIATELY AROUND BUILDINGS SHALL BE SHAPED TO FALL IN EXCESS OF 75 MM OVER THE FIRST 1.5m FROM THE STRUCTURE. STORMWATER MANAGEMENT MUST COMPLY WITH ALL GEOTECHNICAL AND NHBRC STANDARDS AND GUIDELINES. STORMWATER TO RUN AWAY FROM BUILDINGS. NO WATER ACCUMULATION ALLOWED ON THE SITE

DRAINAGE NOTES:
1. NO DRAINAGE BENDS OR JUNCTIONS BELOW FLOORS.
2. BENDS AND JUNCTIONS IN DRAINS TO BE FITTED WITH C.E.'S AND I.E'S WITH MARKED COVERS AT GROUND LEVEL.
3. DRAINS UNDER BUILDINGS TO BE ADEQUATELY PROTECTED AGAINST LOAD.
4. WASTE PIPES TO HAVE RESEAL TRAPS AND TO BE FULLY ACCESSIBLE OVER FULL LENGTH.
5. BATH WASTE 50mm INTERNAL DIAMETER BASIN WASTE 50MM INTERNAL DIAMETER.
6. GULLIES AT KITCHEN TO HAVE CW TAP OVER.
7. ALL SURFACE PLUMBING TO COMPLY WITH NBR,S
8. GULLY TO BE MIN 85mm ABOVE N.G.L AND NO STORMWATER TO RUN IN OR TO BE DIRECTED TO GULLY
9. NO GULLY OR MANHOLE ALLOWED UNDER ANY COVERED AND ENCLOSED AREA
10. VENT PIPES WHERE NEW CLOSED AREAS ARE TO BE CONSTRUCTED MUST BE MOVED OR EXTENDED TO ABOVE THE ROOF IN OPEN VENTILATED AREA
11. ALL RE'S AND IE'S MUST BE ACCESSIBLE FROM N.G.L

SOIL TO BE TREATED WITH APPROVED INSECTICIDES IN ACCORDANCE WITH SANS 10124

NO LARGE ROOTED PLANTS OR TREES TO BE PLANTED IN SERVITUDES OR WITHIN 2M THEREOF

CUT AND FILL WHERE NEEDED.

SITE TO BE PEGGED OUT AND CONFIRMED BEFORE COMMENCING WORK

NOTE:VEGETATION (TREES, SHRUBS) TO BE A MIN OF 2m FROM BUILDING

STORMWATER TO RUN AWAY FROM BUILDINGS. NO WATER ACCUMULATION ALLOWED ON THE SITE

PERMISSIBLE AIR LEAKAGE (AL)
1) GLAZING AND ROOFLIGHTS
MAXIMUM PERMISSIBLE AL FOR OPENABLE GLAZING SHALL BE 2,0 L/S·M2 WITH A PRESSURE DIFFERENCE OF 75 PA, WHEN TESTED IN ACCORDANCE WITH SANS 613.
MAXIMUM PERMISSIBLE AL FOR NON-OPENABLE GLAZING SHALL BE 0,31 L/S M2 WITH A PRESSURE DIFFERENCE OF 75 PA, WHEN TESTED IN ACCORDANCE WITH SANS 613.
FOR GLAZED DOUBLE ACTION SWING DOORS AND REVOLVING DOORS, THE MAXIMUM PERMISSIBLE AL SHALL BE 5,0 L/S·M2 WITH A PRESSURE DIFFERENCE OF 75 PA, WHEN TESTED IN ACCORDANCE WITH SANS 613.

2) CHIMNEYS AND FLUES
THE CHIMNEY OR FLUE OF AN OPEN SOLID-FUEL BURNING APPLIANCE SHALL BE PROVIDED WITH A DAMPER OR FLAP THAT CAN BE CLOSED TO SEAL THE CHIMNEY OR FLUE. NOTE A SOLID-FUEL BURNING DEVICE IS A HEATER THAT BURNS MATERIAL SUCH AS TIMBER OR COAL. THIS DOES NOT APPLY TO GAS AND LIQUID FUEL BURNING DEVICES.

3) ROOF LIGHTS AND SKYLIGHTS
ROOF LIGHTS AND SKYLIGHTS SHALL BE SEALED, OR BE CAPABLE OF BEING SEALED TO MINIMIZE AL. ROOF LIGHTS AND SKYLIGHTS SHALL BE CONSTRUCTED WITH A COMPRESSIBLE SEAL IF THEY ARE OPENABLE.

4) EXTERNAL DOORS
A SEAL TO RESTRICT AL SHALL BE FITTED TO EACH EDGE OF AN EXTERNAL DOOR AND OTHER SUCH OPENING THAT SERVES A CONDITIONED SPACE OR A HABITABLE ROOM IN CLIMATIC ZONES 1, 2, 4 AND 6 AS PER SANS 204. THE SEAL MAY BE A FOAM OR RUBBER COMPRESSIBLE STRIP OR A FIBROUS SEAL. EXTERNAL SWING DOORS SHALL BE FITTED WITH A DRAUGHT PROTECTION DEVICE TO THE BOTTOM EDGE ON EACH LEAF.

5) EXHAUST FANS
AN EXHAUST FAN SHALL BE FITTED WITH A SEALING DEVICE SUCH AS A SELF-CLOSING DAMPER OR FILTER WHEN SERVING A CONDITIONED SPACE OR A HABITABLE ROOM IN CLIMATIC ZONES 1, 2, 4 AND 6 AS PER SANS 204.

6) ROOFS, WALLS AND FLOORS
ROOFS, EXTERNAL WALLS, EXTERNAL FLOORS AND ANY OPENING SUCH AS GLAZING OR DOOR IN THE EXTERNAL FABRIC SHALL BE CONSTRUCTED TO MINIMIZE AIR LEAKAGE IN ACCORDANCE WITH 4.4.1 OF SANS 204 WHEN FORMING PART OF THE EXTERNAL FABRIC OF A CONDITIONED SPACE OR A HABITABLE ROOM IN CLIMATIC ZONES 1, 2, 4 AND 6 AS PER SANS 204.

GENERAL NOTES:

QUALITY OF ALL MATERIALS AND WORKMANSHIP TO COMPLY WITH THE RELEVANT S.A.B.S. SPECIFICATION AND SHALL COMPLY WITH THE MINIMUM STANDARD SPECIFIED IN THE STANDARD PREAMBLES IN THE BILL OF QUANTITIES OR, IN THE ABSENCE OF A BILL OF QUANTITIES, AVAILABLE FOR PERUSAL AT THE OFFICES OF THE ARCHITECTS.
THE CONTRACTOR IS RESPONSIBLE FOR CORRECT SETTING OUT OF THE BUILDINGS, ALL EXTERNAL AND ALL INTERNAL WALLS WITH PARTICULAR REFERENCE TO BOUNDARIES, BUILDING LINES, ETC.

THE CONTRACTOR IS TO VERIFY LEVELS, HEIGHTS AND DIMENSIONS ON SITE AND TO CHECK SAME AGAINST THE DRAWINGS BEFORE PUTTING ANY WORK IN HAND. ANY DISCREPANCIES FROM THE THEORETICAL TO BE BROUGHT TO THE ARCHITECT'S ATTENTION.

THE CONTRACTOR AND ALL SUB-CONTRACTORS ARE TO CHECK THE DETAILS SHOWN ON THIS DRAWING FOR COMPLIANCE WITH STANDARDS OF BEST BUILDING PRACTICE (WHICH IS WHAT IS EXPECTED TO BE DELIVERED) WITH PARTICULAR REFERENCE TO SPECIAL REQUIREMENTS NECESSITATED BY LOCAL AND/OR ON SITE CONDITIONS AND TO REPORT ANY COMMENT TO THE ARCHITECTS.

THE CONTRACTOR IS TO LOCATE AND IDENTIFY EXISTING SERVICES ON SITE AND TO PROTECT THESE FROM DAMAGE THROUGHOUT THE DURATION OF THE WORKS.

ANY ERRORS, DISCREPANCIES OR OMISSIONS ON THIS DRAWING ARE TO BE REPORTED TO THE ARCHITECT IMMEDIATELY.

THE CONTRACTOR IS TO BUILD IN APPROVED DPC'S, WHETHER OR NOT THESE ARE SHOWN ON DRAWINGS, TO ALL EXTERNAL WALLS AT EACH FLOOR, BEAM OR PARAPET LEVEL AND TO ALL WINDOWS, DOORS, GRILLES OR OTHER OPENING IN EXTERNAL WALLS. CAVITY WALLS TO HAVE STEPPED DPC'S.

ANY QUERIES ARISING FROM THE ABOVE MUST BE REPORTED TO THE ARCHITECT FOR CLARIFICATION BEFORE ANY WORK IS PUT IN HAND.

THIS DRAWING IS NOT TO BE SCALED. FIGURES TO BE USED AT ALL TIMES. WHERE FIGURED DIMENSIONS ARE GIVEN, THIS MUST BE CONFIRMED BY THE ARCHITECT.

BURNT CLAY BRICKS IN COMPLIANCE WITH THE RELEVANT S.A.B.S. CODE ONLY SHALL BE USED UNLESS SPECIFIC APPROVAL IS OBTAINED FROM THE ARCHITECT FOR THE USE OF ALTERNATIVE TYPE OF BRICK.

THERMAL INSULATION
INSULATION SHALL COMPLY WITH MINIMUM REQUIRED R-VALUES AND BE INSTALLED SO THAT IT ABUTS OR OVERLAPS ADJOINING INSULATION OR IS SEALED, FORMS A CONTINUOUS BARRIER WITH CEILINGS, WALLS, BULKHEADS OR FLOORS THAT CONTRIBUTE TO THE THERMAL BARRIER AND DOES NOT AFFECT THE SAFE OR EFFECTIVE OPERATION OF ANY SERVICES, INSTALLATION, EQUIPMENT OR FITTINGS.
THERMAL INSULATION MATERIAL SHALL BE EITHER NON-COMBUSTIBLE WHEN TESTED IN ACCORDANCE WITH SANS 10177-5 AND MAY BE INSTALLED IN ALL OCCUPANCY CLASSES OR CLASSIFIED AS COMBUSTIBLE IN ACCORDANCE WITH SANS 10177-5 AND SHALL BE TESTED AND CLASSIFIED IN ACCORDANCE WITH SANS 428 FOR ITS USE AND APPLICATION.
REFLECTIVE INSULATION SHALL BE INSTALLED AND SUPPORTED WITH THE NECESSARY AIRSPACE IN ORDER TO ACHIEVE THE REQUIRED R-VALUE BETWEEN A REFLECTIVE SIDE OF THE REFLECTIVE INSULATION AND A BUILDING LINING OR CLADDING, WITH THE REFLECTIVE INSULATION TIGHTLY FITTED AND TAPED AGAINST ANY PENETRATION, DOOR OR WINDOW OPENING AND WITH EACH ADJOINING SHEET OF ROLL MEMBRANE BEING OVERLAPPED BY NOT LESS THAN 100 MM OR TAPED TOGETHER.

BUILDING ENVELOPE AIR SEALING
ROOFS, EXTERNAL WALLS, AND FLOORS THAT FORM THE BUILDING ENVELOPE AND ANY OPENING SUCH AS WINDOWS AND DOORS IN THE EXTERNAL FABRIC SHALL BE CONSTRUCTED TO MINIMIZE AIR LEAKAGE. THE BUILDING SEALING CAN BE DONE BY METHODS SUCH AS CAULKING, OR ADDING SKIRTING, ARCHITRAVES, CORNICES OR ANY OTHER APPROVED METHOD.

AIR INFILTRATION AND LEAKAGE
IN CLIMATIC ZONES 1, 2, 4 AND 6 THE CEILING VOIDS AND ATTICS SHALL BE DESIGNED SO AS TO MINIMIZE AIR INFILTRATION. ACCORDINGLY, WALL PLATE AND ROOF JUNCTIONS SHALL BE SEALED. ALL TILE ROOFS IN THESE CLIMATIC ZONES SHALL HAVE A TILE UNDERLAY OR RADIANT BARRIER AND THE JOINTS SHALL BE SEALED. THE JOINTS IN SHEETED ROOFS SHALL ALSO BE SEALED.

GENERAL NOTES:
1. ALL WINDOW AREAS EXCEED 10% OF FLOOR AREA OF WHICH 50%
2. READ FIGURED DIMENSIONS IN PREFERENCE TO SCALING.
3. ALL LEVELS DIMENSIONS, HEIGHTS OF PLINTHS, DEPTHS OF EXCAVATIONS AND NUMBER OF STEPS TO BE FINALLY CHECKED AND DETERMINED BY CONTRACTOR ON SITE.
4. DRAWINGS PREPARED ON BASIS OF SURFACE EXAMINATION ON SITE.
5. RECOMMEND- AB'S OVER ALL WINDOWS AND DOORS WITHOUT FANLIGHTS.
6. RECOMMEND- 2AB'S TO W.C'S BATHROOMS, KITCHENS AND SERVANT'S ROOMS.
7. OBSCURE GLASS TO SERVANTS ROOM WC'S AND BATHROOMS.
8. ALL HANDRAILS TO BE MIN 1,000MM HIGH, BALUSTERS MAX 100 C/C



ALL DIMENSIONS TO BE MEASURED OUT AND PEGGED ON SITE BEFORE COMMENCING WORK

ALL REINFORCED CONCRETE SLABS, FOUNDATIONS, COLUMN DETAILS, BEAMS, STAIRS AND RETAINING WALLS TO BE BUILT STRICTLY IN ACCORDANCE WITH ENGINEERS DETAIL AND UNDER HIS/HER SUPERVISION

BUILDING MUST BE IN ACCORDANCE WITH THE APPROVED BUILDING PLAN. NO CHANGES MAY BE MADE TO SUCH PLANS WITHOUT THE EXPRESSED CONSENT OF THE AUTHOR OF SUCH DOCUMENT

FLOORS,WALLS,GEYSER PIPES AND ROOFS TO BE INSULATED IN ACCORDANCE WITH SANS 10400

ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH ENGINEERING DRAWINGS

COPYRIGHT NOTICE

Copyright © 2011 *(Open Studio Designs cc)*. Copyright subsists in this drawing. The person or entity whose name appears in the title block of this drawing, is hereby granted a non-exclusive license to use, display, print and / or reproduce this drawing to the extent necessary to carry out and complete the project described in the title block of this drawing.

This license in respect of the copyright is expressly limited as aforesaid and the person and/or entity referred to above shall not be entitled to grant sub-licenses in respect of the copyright in this drawing to any other entity.

This license confers no ownership rights in the copyright vesting in the drawing and this drawing and the copyright subsisting therein will, at all times, remain the property of *(Open Studio Design cc)*.

Any unauthorized reproduction, publication, transmission, adaptation and/or inclusion of this drawing in a cinematograph film or television broadcast is an act of copyright infringement which will render the doer of the act liable for civil law copyright infringement and may in certain circumstances render the doer liable to criminal prosecution .

Requests and enquiries concerning this drawing and the rights subsisting therein should be addressed to the copyright owner.

ACTS OF PARLIAMENT

All Contractors shall ensure that, before any work is put in hand, they comply with all the necessary Acts of Parliament of the Republic of South Africa.

BULKED INSULATION IN CEILINGS MAY NOT BE LESS THAT 50mm AGAINST THE WALL WHERE THE IS NO INSULATION IN THE WALL

THERMAL INSULATION MATERIAL TO BE NON COMBUSTIBLE WHEN TESTED IN ACCORDANCE WITH SANS 10177/5 OR CLASSIFIED AS COMBUSTIBLE WITH SANS 10177/5 AND SHALL BE TESTED AND CLASSIFIED IN ACCORDANCE WITH SANS 428FOR IT'S USE AND APPLICATION

REFLECTIVE INSULATION TO BE TIGHTLY FITTED AND TAPED AGAINST ANY PENETRATION, DOOR OR WINDOW OPENING AND WITH EACH ADJOINING SHEET OF ROLL MEMBRANE BEEN OVERLAPPED BY MIN 100mm OR TAPED TOGETHER.

SPECIFICATIONS

1. GENERAL
1.1 THIS DRAWING IS NOT TO BE SCALED, USE FIGURED DIMENSIONS ONLY. ALL DIMENSIONS AND HEIGHTS TO BE CHECKED AND VERIFIED BEFORE ANY WORK COMMENCES ON SITE. ANY DISCREPANCIES SHALL BE REPORTED TO THE ARCHITECT IMMEDIATELY. ALL LEVELS, HEIGHTS OF PLINTHS, DEPTH OF EXCAVATIONS AND NUMBER OF STEPS TO BE FINALLY CHECKED BY CONTRACTOR ON SITE.
1.2 THE SITE TO BE TREATED IN ACCORDANCE WITH S.A.B.S. CODE OF PRACTICE NO.0124-1977 WITH 'SHELLDRITE' TERMITEPRUFE SOIL POISONER.
1.3 TOP OF FOUNDATIONS TO BE A MINIMUM OF 300mm BELOW NATURAL GROUND LEVEL.
1.4 BACKFILL TO FOUNDATIONS.
1.5 TOP OF 75mm CONCRETE SURFACE BED TO BE MINIMUM OF 150mm ABOVE FINISHED GROUND LEVEL
1.6 75mm THICK CONCRETE SURFACE BED TO BE ON 'GUNPLAS' USB GREEN DAMP PROOF MEMBRANE ON SAND BINDING ON WELL COMPACTED FILL.
1.7 'GUNDLE' BRICKGRIP S.A.B.S. EMBOSSED D.P.C 375 MIC. UNDER ALL WALLS, WINDOW CILLS AND AT CHANGES IN FLOOR LEVELS.
1.8 STORMWATER SHALL BE REMOVED FROM DWELLING, YARD AND SITE.
1.9 ELECTRICAL INSTALLATION SHALL BE 'HEINEMANN' EARTH LEAKAGE SYSTEM IN DISTRIBUTION BOARD.
1.10 ALL BUILDING WORK TO BE CARRIED OUT IN ACCORDANCE WITH LOCAL AUTHORITIES BUILDING BY-LAWS AND REGULATIONS.

2. FOUNDATIONS
2.1 ALL FOUNDATIONS, RETAINING WALLS, STRUCTURAL CONCRETE WORK AND SUB SOIL STORMWATER DRAINAGE TO CIVIL ENG'S SPECIFICATIONS.
2.2 ALL SOIL COMPACTION TO CIVIL ENG'S SPECIFICATIONS.
2.3 ALL FOUNDATIONS TO BE REINFORCED AS REQUIRED BY ENGINEER.

3. FLOORS
3.1 MIN. 75mm CONCRETE SURFACE BED.
3.2 25mm CEMENT SCREED TO ALL FLOORS.
3.3 SKIRTINGS TO BE PROVIDED.

4. WALLS
4.1 220mm BRICK WALLS WITH GUNDLE BRICKGRIP DPC.
4.2 BRICKFORCE EVERY 4 COURSES AND EVERY COURSE FOR 4 COURSES OVER OPENINGS
4.3 ALL BRICKWORK MIN. 7 Mpa CLASS II.
4.4 WINDOWS BUILT IN WITH GUNDLE BRICKGRIP DPC.
4.5 ALL PAINTWORK TO COMPLY WITH MANUFACTURER'S SPECIFICATIONS WITH NECESSARY UNDERCOATS.
4.6 EXTERNAL-TO PLAN
INTERNAL-PLASTER AND PAINT.

ALL LEVELS, DIMENSIONS, DEPTHS OF EXCAVATIONS, HEIGHTS OF PLINTHS, NUMBER OF STEPS AND SIZES OF FOUNDATIONS TO BE PLACED AT A HEIGHT OF EXISTING STRUCTURE

5. ROOF A
5.1 CHROMADEK SHEETING @ 10º PITCH- DARK DOLPHIN ON STEEL PORTAL FRAME AS PER ENGINEER
5.2 MIN.170mm CONCRETE SLAB TO ENG'S DETAIL.
5.3 MIN. 55mm VEMICULITE INSULATING SCREED TO 1:60 FALL.
5.4 WATERPROOFING BY SPECIALIST TO MANUFACTURERS SPEC.
5.5 150Ø P.V.C RAINWATER DOWNPIPES FROM FULLBORE OUTLETS.
5.6 SKYLIGHTS TO MANUFACTURERS SPEC.
5.7 GUTTERS : MARLEY STREAMLINE SQUARE PROFILE RAINWATER GUTTERS + DOWNPIPES.
5.7 3mmSKIM COAT RHINOLITE ON PLASTERBOARD CEILING FIXED TO 38 X 38mm S.A. PINE BRANDERING AT 450 C/C FIXED TO TIE BEAMS.

6. WINDOWS AND DOORS
6.1a ANY PANE OF GLASS WHICH IS TO BE INSTALLED WITHOUT A SUPPORT FRAME SHALL BE IN ACCORDANCE WITH SABS 0137
6.1b THICKNESS OF PANES IN RELATION TO THEIR AREA SHALL BE IN ACCORDANCE WITH SABS 0137
6.2 EXTERNAL SLIDING DOORS : STANDARD AS PER WINDOWS TO SCHEDULE.
6.3 INTERNAL DOORS : STANDARD HARDWOOD FRAMES TO SCHEDULE
6.4 WINDOWS : ALUMINUM TOP-HUNG
6.5 SLIDING DOORS :STANDARD ALUMINIUM SLIDING DOORS TO SCHEDULE.

7. DRAINAGE NOTES
7.1 100Ø uPVC. SEWER PIPE DRAIN WITH A MIN. FALL OF 1:60.
7.2 100Ø OVP. AT HEAD OF DRAIN PIPE AS SHOWN.
7.3 RODDING EYES AT HEAD OF DRAIN, AT ALL CHANGES OF DIRECTION AND AT MAX. OF 25000 INTERVALS.
7.4 INSPECTION EYES AT ALL JUNCTIONS OF DRAIN, AND TO HAVE MARKED COVERS AT GROUND LEVEL.
7.5 DRAIN PIPE UNDER BUILDING TO BE PROTECTED AGAINST LOAD.
7.6 ALL WASTE PIPE TO HAVE 65mm RE-SEAL TRAPS, ALL WASTE PIPES TO BE ACCESSIBLE OVER ENTIRE LENGTH FOR CLEANING AND REPAIRS.
7.7 ALL WASTE PIPES UNDER FLOOR SLAB TO BE SLEEVED.
7.8 ALL SOIL FITTINGS WITH VERTICAL DISCHARGE GREATER THAN 1220 TO HAVE ANTISYPHON VENTIPIPES.
7.9 RAINWATER DOWNPIPES TO DISCHARGE A MIN. OF 2440 FROM ANY OPEN GULLY
7.10 ALL DRAINAGE WORK TO BE CARRIED OUT IN ACCORDANCE WITH LOCAL AUTHORITIES DRAINAGE BY-LAWS AND REGULATIONS.

Open Studio Designs
Architectural & Interiors
Mobile 083-306-4315
Fax-086-543-8765
openstudio.design@gmail.com

PROPOSED WORKSHOP
ON PTN 465
OF THE FARM KROMDRAAI 560KQ
CLIENT:

WORKING DRAWINGS

TECHNOLOGISTS: ARCHITECT:	W JUNG-KRUGER
DATE:OCT'18	DWG NO: H/KD
DRAWN: WJK	SHEET : 1 OF 7

SITE PLAN DETAIL
SCALE 1:200